





Dimensions 尺寸 (mm)

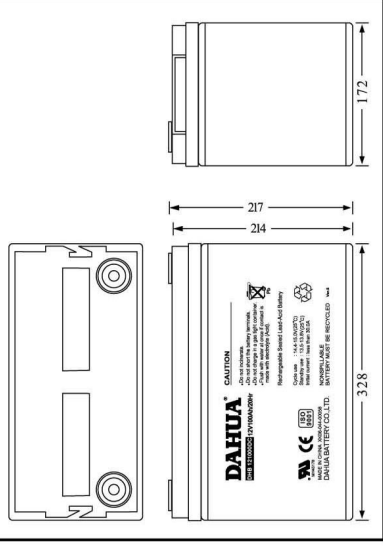

Specifications 规格

Nominal Voltage 额定电压	12V	
Rated Capacity(20 hour rate) 20小时率额定容量	100AH	
尺寸 Dimensions ± 1mm	Length 长	328mm(12.91")
	Width 宽	172mm(6.77")
	Height 高	214mm(8.43")
	Total Height 总高 (with terminals) 含端子	217mm(8.54")
Weight 重量	Approx.30kg (66.14lbs)	
Standard Terminal 标准端子	B2	
Optional Terminal 可选择端子	A5	

放电特性 Discharge Characteristics(20°C,68 °F)

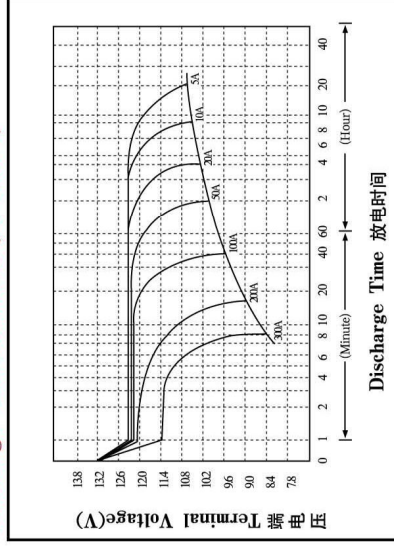

Electrical Specifications 电性能

容量 Capacity 77°F(25°C)	20 hour rate (5A) 20小时率	100AH
	10 hour rate (9.3A) 10小时率	93AH
	5 hour rate (17A) 5小时率	85AH
	1 hour rate (57A) 1小时率	57AH
Internal Resistance 内阻	Fully charged battery 充足电	4.3m Ω
	77°F(25°C)	
	104°F(40°C)	102%
	77°F(25°C)	100%
Capacity Affected by Temperature 容量受温度影响 (20 hour rate)20小时率	32°F(0°C)	85%
	5°F(-15°C)	65%
	Capacity after 3 month storage	92%
	Capacity after 6 month storage	83%
自放电 Self-Discharge 77°F(25°C)	Capacity after 12 month storage	65%
	循环使用：首次充电电流低于30.0A 电压：14.4-15.0V77°F(25°C) 浮充使用：电压13.5-13.8V77°F(25°C) Cycle:Initial Charging Current less than30.0A Voltage14.4-15.0V77°F(25°C) Standby:Voltage13.5-13.8V77°F(25°C)	
Charge Constant Voltage 充电 (恒压)		

放电特性 Discharge Characteristics(0°C/32°F,40°C/104°F)

